



Halo Slate negro 200x100 cm

# Halo Slate


## Standard




## Ral / NCS



## Naturally Made

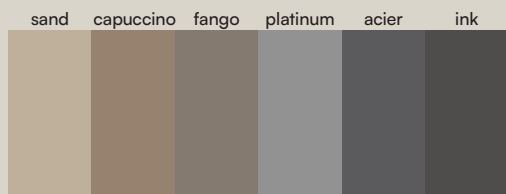


## Season

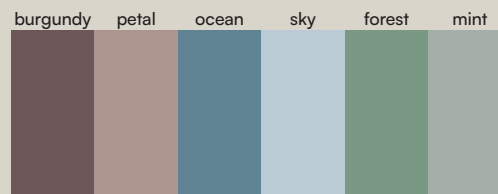


## Dimensiones (cm)


### 70 x

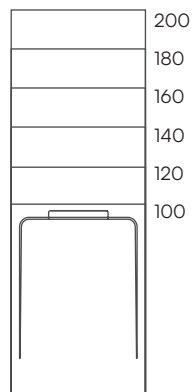


### 80 x

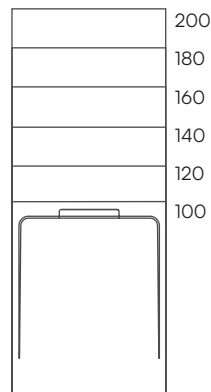

### 90 x

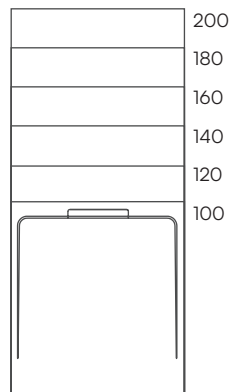


### 100 x

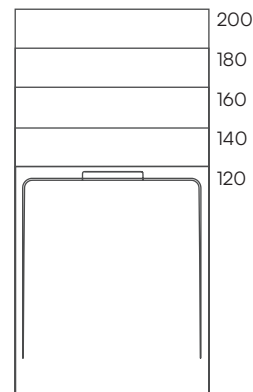

# acquabella

## Dimensiones (cm)



A	B	C	D	E					
100	70/80	4,4	20	40	180	70/80	4,4	20	40
100	90	4,4	20	50	180	90/100	4,4	20	50
120	70/80	4,4	20	40	200	70/80	4,4	20	40
120	90/100	4,4	20	50	200	90/100	4,4	20	50
140	70/80	4,4	20	40					
140	90/100	4,4	20	50					
160	70/80	4,4	20	40					
160	90/100	4,4	20	50					


## Textura



## Tapa




## Zona de secado (cm)



## Zócalo de elevación (cm)



## Desagüe (mm)



## Especificaciones técnicas



UNE- EN 16165:2022 Anexo A  
Antideslizamiento Clase C



Facilidad de corte



Corte seguro. Material sin sílice



XP P 05-010  
Normativa francesa PN 24



Resistente al choque térmico



Resistente a impactos



ISO 22196:2011  
Certificado antibacteriano



Resistente a la hidrólisis.  
0% poliéster ortoftálico



UNE-EN 14527:2016 + A1:2019  
Clase 1



Halo Slate negro 200x100 cm

# Halo Slate


## Standard




## Ral / NCS



## Naturally Made

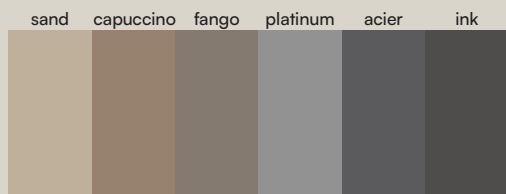


## Season

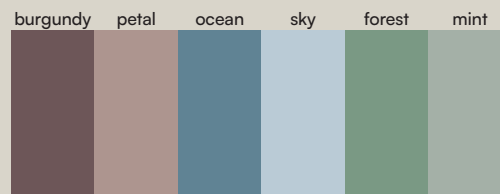


## Dimensions (cm)


### 70 x

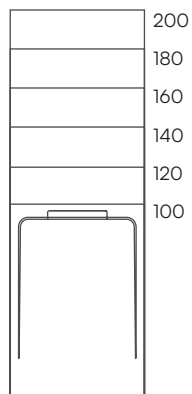


### 80 x

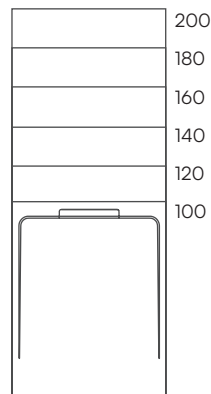

### 90 x

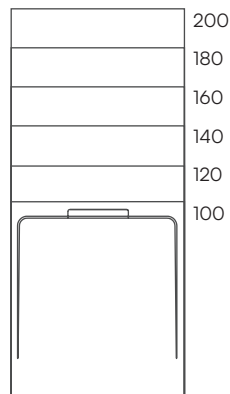


### 100 x

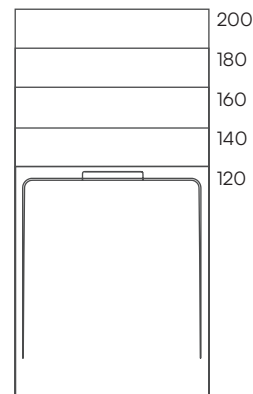

# acquabella

## Dimensions (cm)



A	B	C	D	E					
100	70/80	4,4	20	40	180	70/80	4,4	20	40
100	90	4,4	20	50	180	90/100	4,4	20	50
120	70/80	4,4	20	40	200	70/80	4,4	20	40
120	90/100	4,4	20	50	200	90/100	4,4	20	50
140	70/80	4,4	20	40					
140	90/100	4,4	20	50					
160	70/80	4,4	20	40					
160	90/100	4,4	20	50					


## Texture



## Cache




## Zone de séchage (cm)



## Habillage (cm)



## Bonde (mm)



## Spécificités techniques



UNE- EN 16165:2022 Annexe A  
Antidérapant Classe C



Facile à découper



Découpe sûre-matériau sans silice



XP P 05-010  
Normative française PN 24



Résistant au choc thermique



Résistant aux impacts



ISO 22196:2011  
Certificat antibactérien



Résistant à l'hydrolyse.  
0% polyester ortofálico



UNE-EN 14527:2016 + A1:2019  
Classe 1



Optionnel



Incluido

1PLAHASL-03



Halo Slate negro 200x100 cm

# Halo Slate


## Standard




## Ral / NCS



## Naturally Made

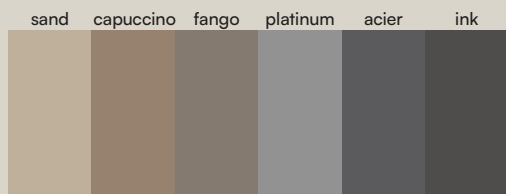


## Season

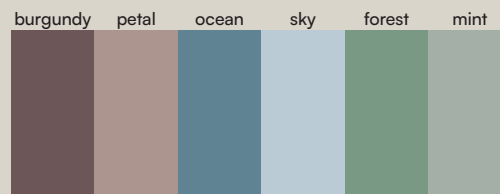


## Sizes (cm)


### 70 x

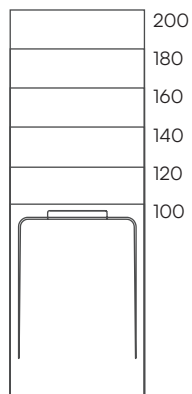


### 80 x

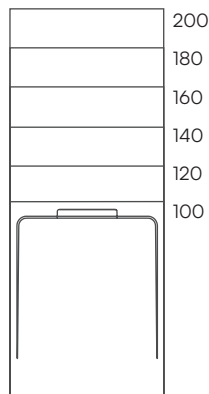

### 90 x

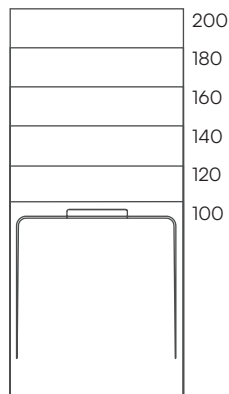

### 100 x

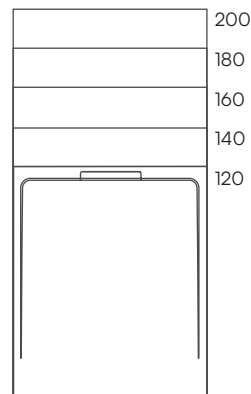

# acquabella

## Sizes (cm)



A	B	C	D	E					
100	70/80	4,4	20	40	180	70/80	4,4	20	40
100	90	4,4	20	50	180	90/100	4,4	20	50
120	70/80	4,4	20	40	200	70/80	4,4	20	40
120	90/100	4,4	20	50	200	90/100	4,4	20	50
140	70/80	4,4	20	40					
140	90/100	4,4	20	50					
160	70/80	4,4	20	40					
160	90/100	4,4	20	50					


## Texture




## Cover




## Drying area (cm)



## Skirt (cm)



## Trap (mm)



## Technical information



UNE- EN 16165:2022 Annex A  
Antislip Class C



Easy to cut



Safe cut. Material without silica



XP P 05-010  
French Normative PN 24



Resistant to thermal shock



Impact resistant



ISO 22196:2011  
Antibacterial certificate



Hydrolisis resistant.  
0% ortoftal-polyester



UNE-EN 14527:2016 + A1:2019  
Class 1



Halo Slate negro 200x100 cm

# Halo Slate


## Standard




## Ral / NCS



## Naturally Made

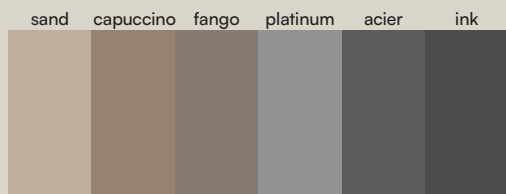


## Season

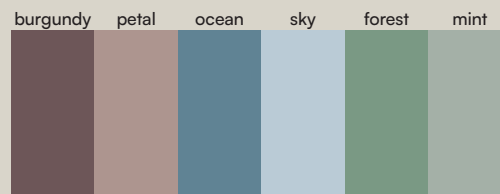


## Misure • Abmessungen (cm)


### 70 x

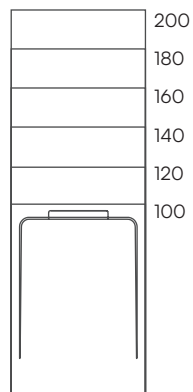


### 80 x

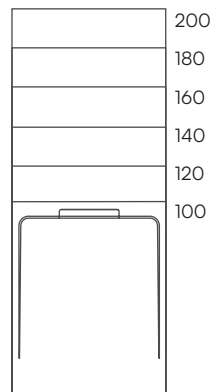

### 90 x

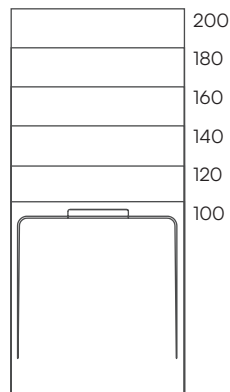

### 100 x

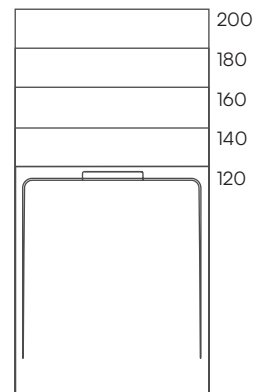

# acquabella

## Dimensioni • Abmessungen (cm)



A	B	C	D	E					
100	70/80	4,4	20	40	180	70/80	4,4	20	40
100	90	4,4	20	50	180	90/100	4,4	20	50
120	70/80	4,4	20	40	200	70/80	4,4	20	40
120	90/100	4,4	20	50	200	90/100	4,4	20	50
140	70/80	4,4	20	40					
140	90/100	4,4	20	50					
160	70/80	4,4	20	40					
160	90/100	4,4	20	50					


## Finiture • Oberfläche



## Copripiletta • Abdeckung




## Zona di asciugatura • Podest (cm)



## Zoccoli per piatti • Sockel (cm)



## Scarichi • Abläufe (mm)



## Specifiche tecniche • Technische spezifikationen



UNE- EN 16165:2022 Allegato A - Anhang A  
**Antiscivolo Classe C**  
Rutschfestigkeit Klasse C



**Facilità di taglio**  
Einfach zu schneiden



**0% Si**  
**Taglio sicuro. Materiale senza silice**  
Sicherer Schnitt. Produkt ohne Silizium



XP P 05-010  
**Normativa francese PN 24**  
Französische Normative PN 24



**Resistente allo shock termico**  
Resistent gegen Temperaturschock



**Resistente agli urti**  
Schlagfest



ISO 22196:2011  
**Certificato antibatterico**  
Zertifikat zur antibakteriellen Wirksamkeit



**Resistente all'idrolisi.**  
**0% poliestere orto-ftalico**  
Resistent gegen hydrolyse.  
0% ortho-ftal-polyester



**CLASS 1**  
UNE-EN 14527:2016 + A1:2019  
**Classe 1**  
Klasse 1